


15.6" 工业平板电脑



特点

- 可选Intel Celeron J4125/J6412或第8/10/11代-U Intel Core i5/i7
- J4125/J6412: DDR4 SODIMM x1; Core 5/i7: DDR4 SODIMM x2
- LCD+HDMI 双显, 同步/异步模式
- 全平面触摸屏, 前面板IP65防护等级
- 低功耗无风扇
- 9 ~ 36V 宽压输入

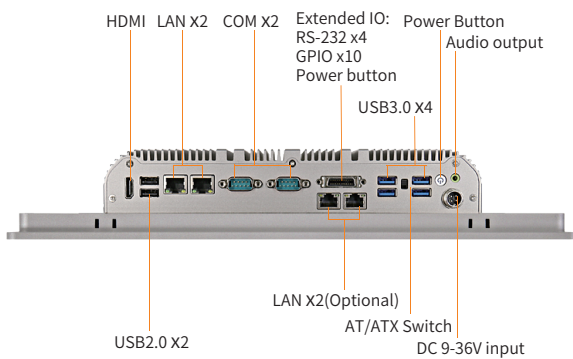


规格

系统		
名称		
处理器	Intel Celeron J4125/J6412 CPU Intel Core 8/10/11代-U i5/i7 CPU	
系统内存	J4125/J6412: DDR4 SODIMM x1 Core i5/i7: DDR4 SODIMM x2	
网络	2x 2.5 GbE RJ45 Intel® i225V (4 x 2.5GbE RJ45 Intel i225V)	
I/O 接口	4 x USB2.0 ¹ , 2 x USB3.0 ¹ (J4125/J6412) 2 x USB2.0 ¹ , 4 x USB3.0 ¹ (第8/10/11代intel酷睿i5/i7) 2 x DB-9 COM1&COM2, RS-232/422/485 1 x Audio Line-out 2 x 8Ω 1W 功放输出 (可选) 1 x AT/ATX 拨码开关 1 x HDMI 1 x 扩展IO: 集成4路3线COM, 10路GPIO, 1个远程开关	
存储	1 x M.2 2242/2260/2280 SATA 1 x SATA(2.5" SATA) 1 x M.2 2280 NVME	
扩展槽	M.2 3042/3052 3G/4G/5G 模块, 板载SIM卡槽 M.2 2230 WiFi蓝牙	
看门狗定时器	1~65535 秒可编程设置	
支持系统	Windows® 10/11, WES 10, LINUX	
结构		
材质	铝	
安装方式	VESA 75/ 100 面板安装	
尺寸	402.76x252.19x65.3 mm	
重量	TBD	
使用环境		
工作温度	-20°C ~ 60°C	
存储温度	-30°C ~ 70°C	
存储湿度	10~90% @30°C, 无凝结	
电源		
电源输入	DC 9 ~ 36V 4-pin 航插	
显示屏		
LCD 类型	15.6" TFT-LCD	
分辨率	1920x1080	
最大颜色	262K	
亮度	250 cd/m ²	
视角(CR>=10)	-85~ 85° (H), - 85~ 85° (V)	
背光	LED	
背光寿命 (小时)	30,000	
触摸屏		
类型	5线电阻式	投射式电容
透过率	78%	>85%
使用寿命	250克点击 1000万次	>5000万次

15.6"工业平板电脑

尺寸 ■ 单位:mm

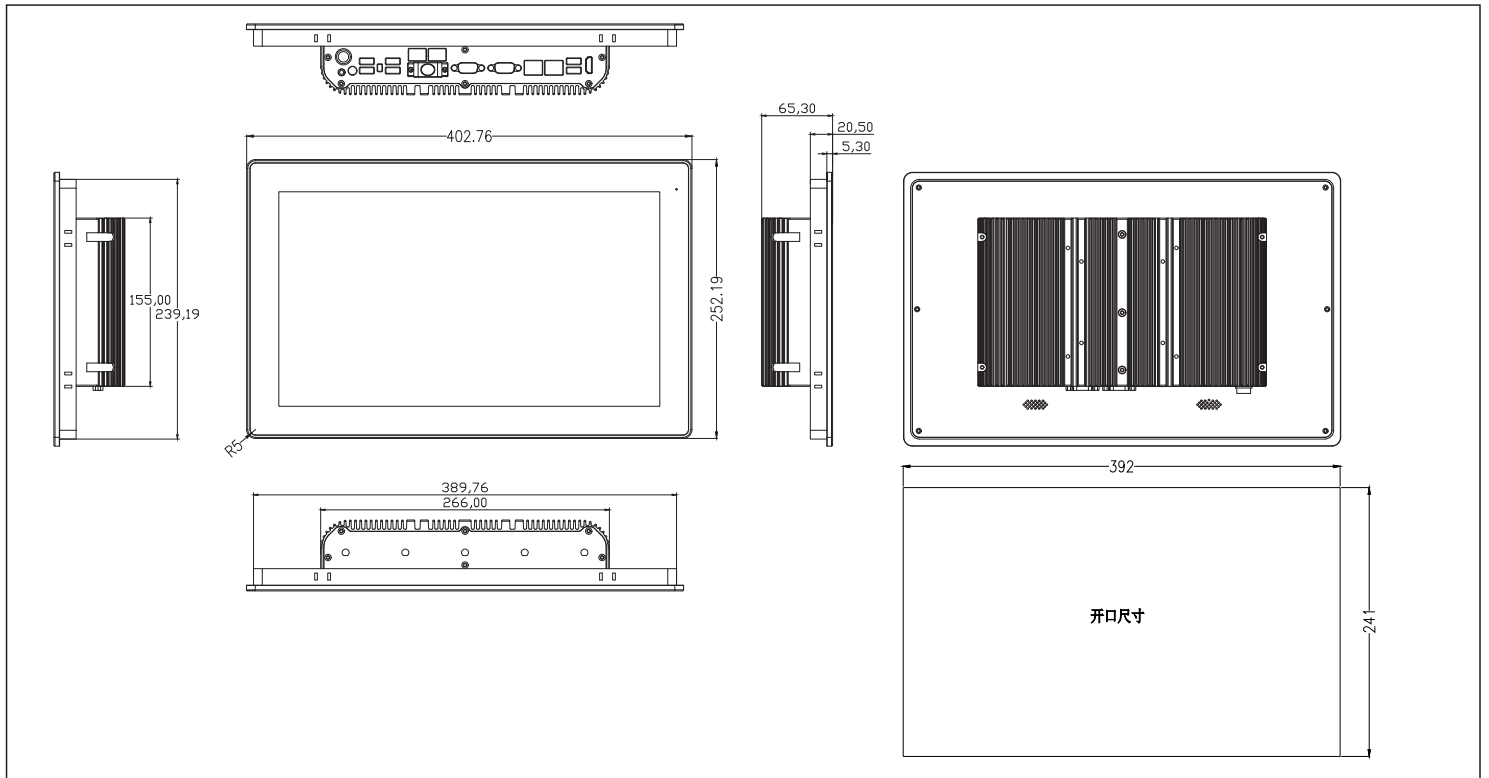

订购信息

物料编码	描述
	15.6" TFT LCD J4125 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD J6412 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i5-8260U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i5-8365U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i7-8565U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i7-8569U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i5-10210U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i5-10310U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i7-10510U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	15.6" TFT LCD i7-10610U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter

备注:

- (1) 配置赛扬系列CPU 的产品, I/O面板有4个USB2.0接口2个USB3.0接口; 酷睿系列 CPU的产品, 有4个USB3.0 接口和2个USB2.0
- (2) 配置赛扬系列CPU产品, 内存有一个DDR4 内存槽; 酷睿系列CPU产品, 内存有两个DDR4内存槽

装箱单

- 电源适配器
- 凤凰端子
- 螺丝

可选配件

- WIFI模块
- 3G/4G/5G 通信模块
- VESA支架